


E10


10,000 lb. capacity



- 1** Maximize service capabilities and revenue potential
- 2** Minimize the need for truck adapters by meeting a wider range of vehicle manufacturer designated pick up points
- 3** Allows lift to be placed in service bay with 12' ceiling
- 4** Allows technician to disengage both columns simultaneously
- 5** Prevents vehicle damage from being raised too high
- 6** Provides long lasting durable finish
- 7** Provide added security against door damage

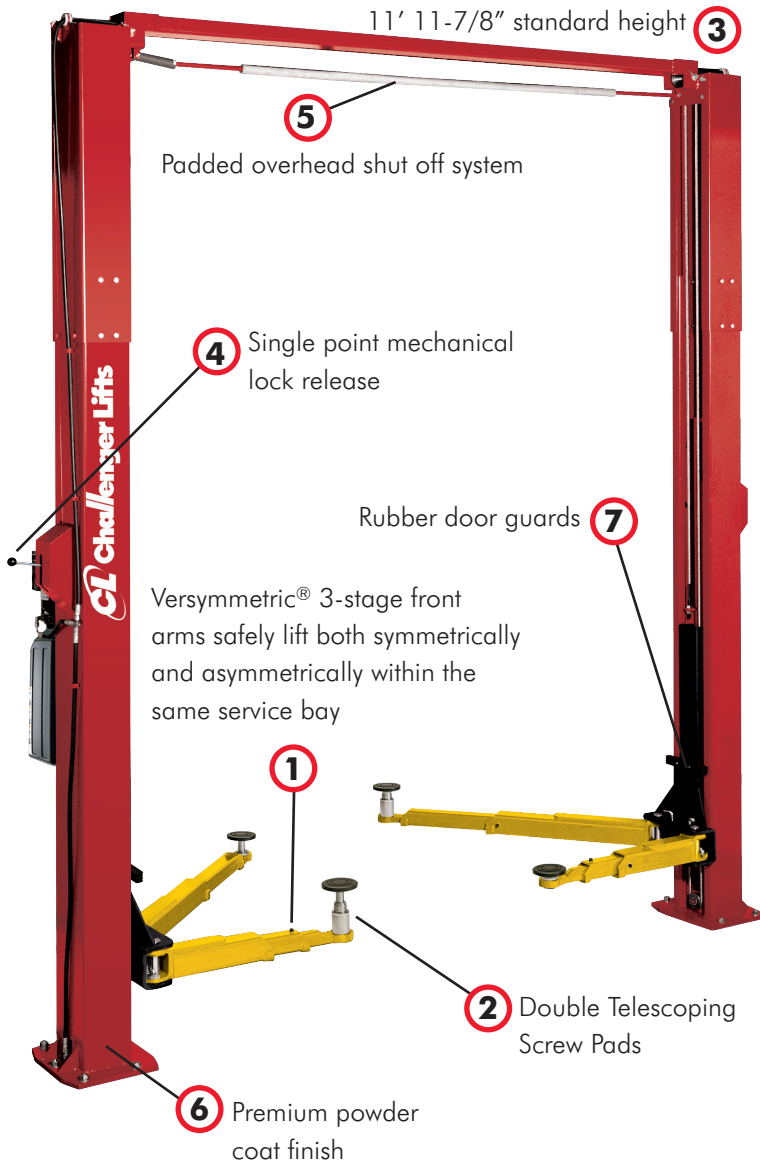

The Automotive Lift Institute (ALI) certifies that the E10 described herein complies with the applicable provisions of the American National Standards ANSI/ALI ALCTV 2006 and are Third Party Validated by the ETL Testing Laboratory.



Double Telescoping Screw Pads

The E10 is equipped with standard Double Telescoping Screw Pads reducing the need for adapters.



Versymmetric® Technology

Versymmetric® Technology

The E10's specially engineered Versymmetric® 3-stage front arms safely lift symmetrically and asymmetrically within the same service bay .